


PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Jan. 2021

Item number:	14301251
Product name:	Moland Loc Parket, Ash

Picture

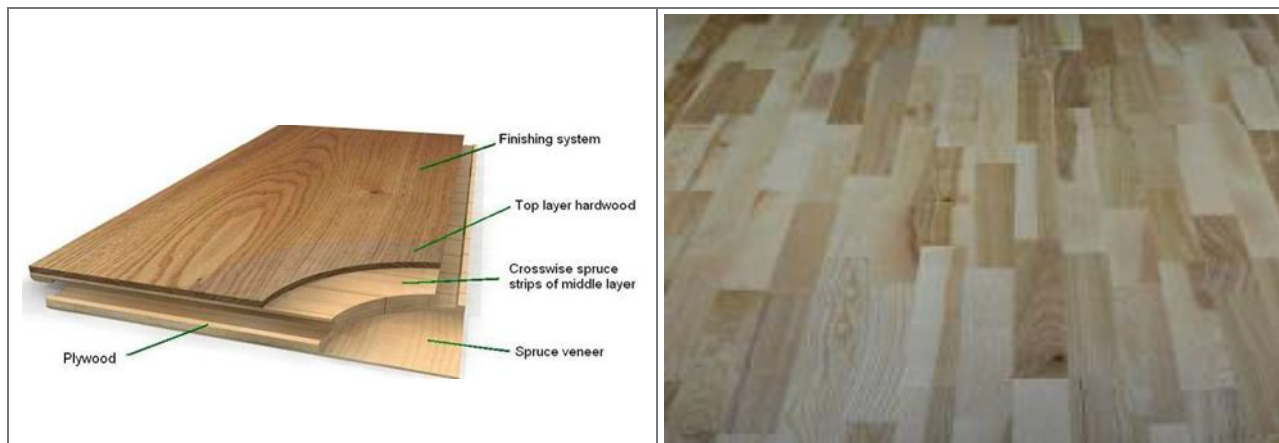

Picture no. 1

Picture no. 2

Product description

Appearance	Parquet with natural yellowish to slight brown color (or ash wood in white color finishing), with brown and dark brown strips and clearly marked structure and characteristic for ash dark heartwood and knots. The ash floor characterizes with large changeability of tints.
Classification ac. To N13489	Free Class, Living
Pattern of surface	3 strips
Finishing	7 layers, 2 layers of UV filler + 5 layers of UV lacquer
Lacquer	Uv lacquer, Matt, gloss 9-12
Oil	-
Hardness	Hard wood
Floor heating installation	27° on top off wood floor

Dimensions

Length	2190 mm	<input checked="" type="checkbox"/> Cleaning and maintenance instructions – www.moland.dk
Width	182 mm	<input type="checkbox"/> Can be used for eco-label construction.
Thickness	13,3 mm	<input type="checkbox"/> FDV-documentation – www.moland.dk
Top layer	2,7 mm	

Lamel sizes

<ul style="list-style-type: none">- Up to 1,5% of the material in delivery can be shorter for 30 mm.- Above 80% lamellas with length of 150-250 mm is acceptable (not applicable to the lamellas at the ends of boards - the minimum length 50 mm).
--

PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Jan. 2021

Technical specification

Dimension	13,3x182x2190 mm	Delamination	Not allowed
Top layer	2,7 mm	Torn grain	Not allowed
Middle layer	8,4 mm	Colour on bevel and surface	Homogeneous expression
Bottom layer	2 mm	Pressure marks	Not allowed
Locking method end	M5	Product marking	CE
Locking method longside	M5	Boards per packet/ m ²	9 boards = 3,58 m ²
Fire class	D _{fl} - s1	Packet per pallet/ m ²	40 packets = 143,49 m ²
Formaldehyde content	E1		
Thermal conductivity	0,11 W/mk		

Production tolerance

Moisture content	7% + -2%
Height difference	≤ 0,2 mm, 0,3 mm to a limited extent
Width	± 0,2 mm
Length	± 0,1%
Squareness	± 0,2% over the width
Crosswise bending	± 0,2% over the width
Longitudinal bending	± 1% of the length
Spring across the element	≤ 0,1% over the length

Grading


Fresh knots	Healty, integrated not limited	
Cracked filled knots	Black unsound (fillet with dark brown putty)	
Dead knots	≤ 20 mm diameter / filled with dark brown putty.	
Dark lines	Allowed - moderately	
Cracks	Not allowed	
Bark pockets	Without limitations	
Sapwood	Allowed	
Structure variation	Allowed	
Color variation	Allowed	
Worm hole	Not allowed	
Blue stained	Not allowed	
Stain (discoloration)	Not allowed	
Rot	Not allowed	

PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Jan. 2021

Packing

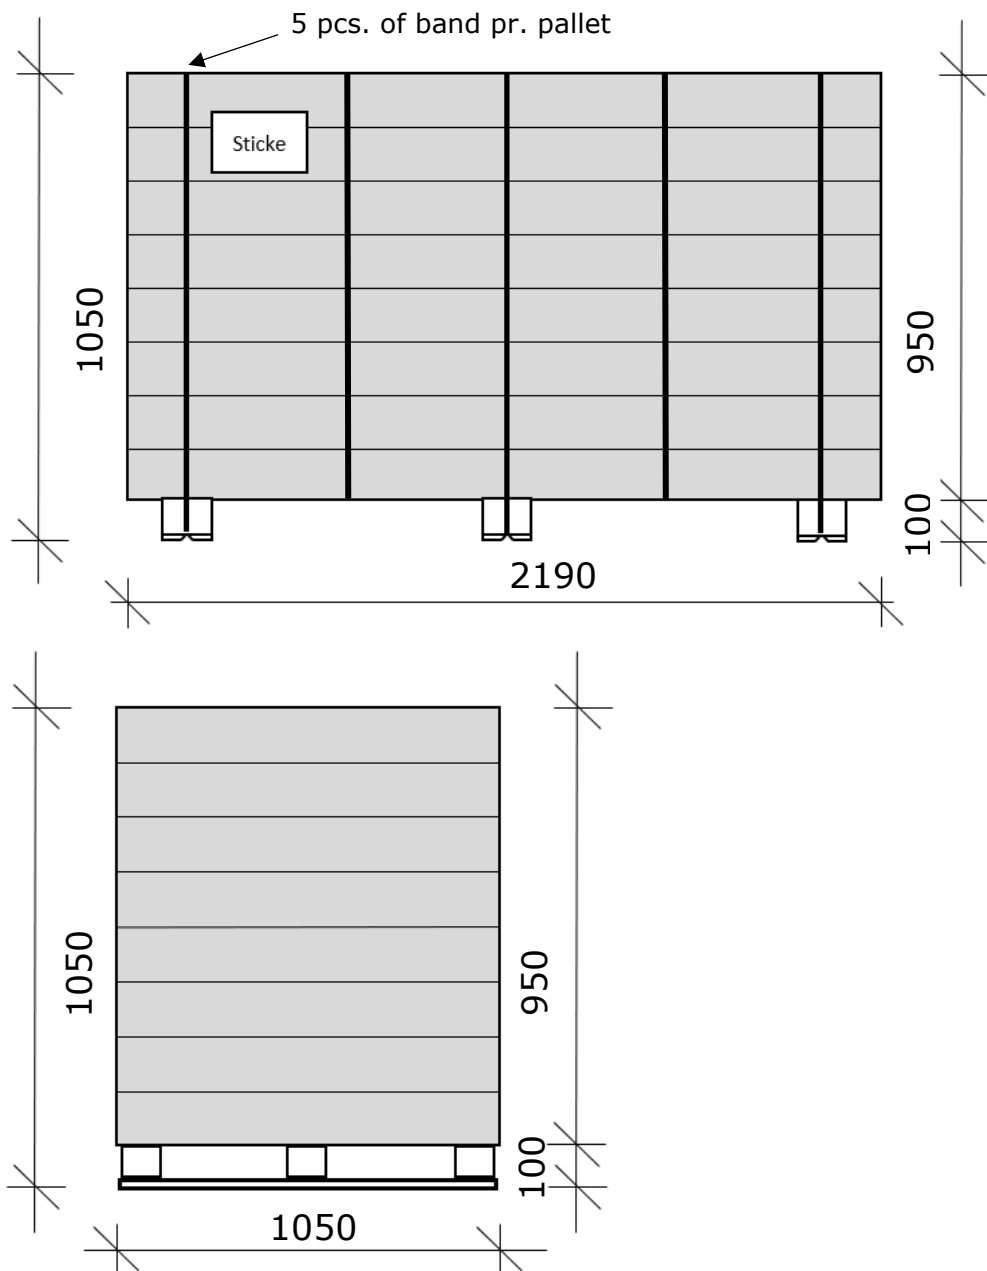

Pallets

Number of boards per pack	8 boards
M ² / pack	3,58 m ²
Packs / pallet	40 packs
Layer / pallet	10 layers
M ² / pallet	143,49 m ²